


Filter housing Cartridge filter AFK27-36

1. Introduction

The amafilter housings type AFK 27 - 36 are industrial cartridge filter housings in stainless steel. These models have as special feature, the in-line inlet and outlet.

The AFK cartridge housings are an economical solution for all industrial liquid and gas applications conform to PED 97/23/EC category III.

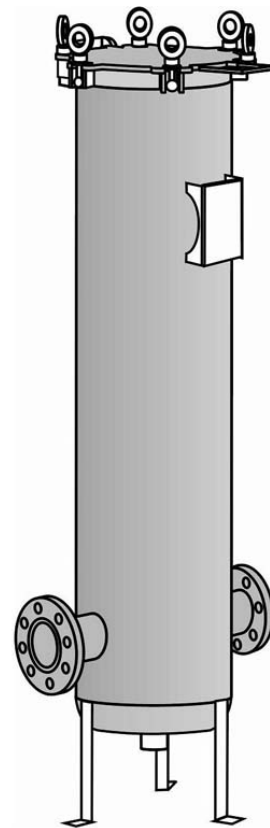

2. Features

- Cover closing with hinged eye bolts and eye nuts (stainless steel)
- Flat cover with hinge and handle
- Easy to install as connections are on equal height
- Fully drainable vessel
- O-ring sealing: standard Buna-N. Other materials on request
- Compact design
- Pickled and passivated
- Suitable for 9 filter cartridges of 30" or 40" length
- Available from stock or at short notice

4. Models

MAHLE Industrial Filtration can supply two standard sizes in stainless steel from stock. These are available with flanged connections.

Other standard filter housings

We also supply other standard filter housings suitable for all industrial liquid and gas applications for various flow rates.

For more information please contact your representative.

3. Standard specifications

Design pressure	: 12 / -1 bar(g)
Design temperature	: -10 / 150 °C
Operating temperature	: depending on the filter media and gaskets used
Design	: AD-2000 Regelwerk
Approval	: PED 97/23/EC cat. II/III
Maximum differential pressure	
design	: 2.5 bar
operating	: depending on type of filter cartridge

The internal construction is designed to suit:

- Double Open End X0, X4 and X9
- Single Open End X3


For use of DOE cartridges, tube guides and compression springs are supplied for quick and trouble free installation. For filter cartridges with X3 end cap configuration a compression plate is recommended.

5. Filter cartridges

MAHLE Industrial Filtration supplies a wide range of filter cartridges in different materials, pore sizes, dimensions and models to fit in amafilter housings as well as those of other manufactures.

For detailed information about filter cartridges, please contact your representative.

7. Dimensions

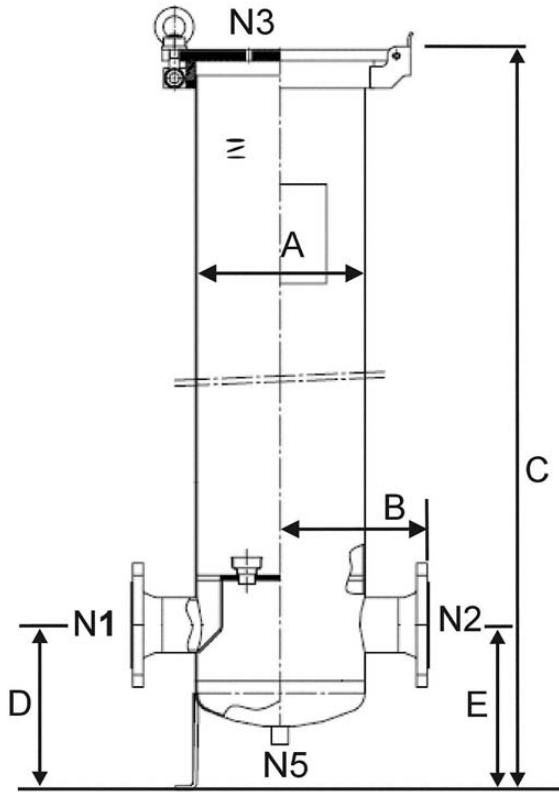

Nozzle specification	
N1 :	Inlet (DN80 EN1092-1 PN16)
N2 :	Outlet (DN80 EN1092-1 PN16)
N3 :	Vent (Rp¼ - ISO7-1)
N5 :	Clean drain (Rp½ - ISO7-1)

Model	Dimensions						Volume [dm ³]	Weight [kg]
	Diameter [mm] A	Standout [mm] B	Height [mm] C	Nozze height [mm] D	Nozze height [mm] E			
AFK27	273	240	1195	265	265	60	68	
AFK36	273	240	1470	265	265	75	73	

Height required for changing cartridges is height C plus cartridge length.

Dimensions are for reference only. Use dimensional drawing for installation purposes.

Subject to technical alteration without prior notice.

8. Ordering code

Example

AFK36

4

T

3F

amafilter type

AFK27

AFK36

Cartridge length

3 = 30"

4 = 40"

Material

T = 316Ti (1.4571)

Inlet/outlet

3F = DN80 acc. EN1092/PN16

MAHLE Industrial Filtration (Benelux) B.V

P.O.Box 396 1800 AJ

Alkmaar - The Netherlands

Phone +31 (0) 72 5273400

Fax +31 (0) 72 5125207

mahle.amafilter@mahle.com

<http://www.mahle-industrialfiltration.com>

10/2009