

Filter Cartridge amaGuard FP

Offshore

1. Introduction

The amaGuard FP is a glass fibre pleated filter cartridge, which has been specially made for the offshore industry, for the filtration of for example completion fluid or injection sea water. This filter cartridge uses a high quality microfibre glass filter medium, creating a high performance filter cartridge.

The unique design and filter media ensures a high flow, low pressure drops and high dirt load capacity, resulting in economic filtration during its long service life.

The amaGuard FP range of filter cartridges have been designed to work at a maximum temperature of 65 °C and a maximum recommended differential pressure of 2.5 bar. The filter media has been specifically designed and optimised to provide a high dirt holding capacity to enable longer service life with low differential pressure drops.

The amaGuard FP range of filter cartridges offer the ideal solution for pre and final filtration of a wide variety of process fluids, giving a long service life at a cost effective level.



2. Features

- High capacities at low pressure drops
- Rated at 90% efficiency
- Colour coded polypropylene netting for easy micron rating identification
- Broad chemical compatibility

3. Colour coding

Colour coding for PP Netting


Green	: 0.2 micron
Yellow	: 0.45 micron
White	: 1 micron
Blue	: 3 micron

Nominal and absolute particle retention [μm]		
Cartridge type	90 %	$\geq 99.9\%$
FP0.2	0.20	1
FP0.45	0.45	2
FP1	1	4
FP3	3	10

4. Product/Performance specifications

Filter medium	: microfibre glass
Support medium	: polyester
Hardware	: polypropylene
Outer cage	: polypropylene netting
End cap seal	: thermally bonded
Gaskets/O-rings	: Buna-N (standard), silicone
<i>Dimensions</i>	
External diameter	: 66 mm
Length	: 40"
Maximum recommended differential pressure	: 2.5 bar

5. Water flow rate for 10" cartridge

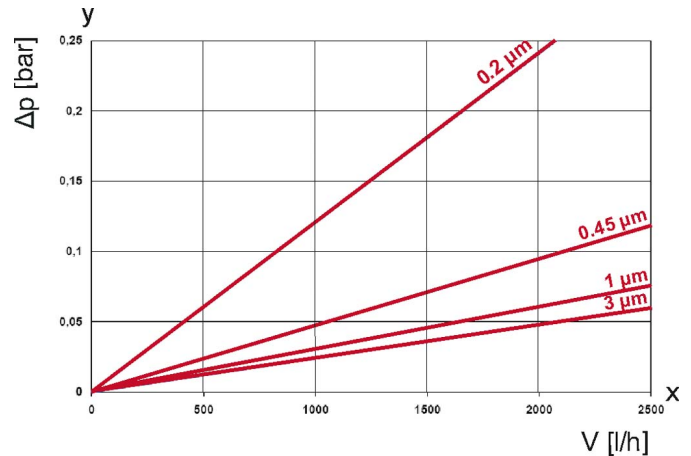

x=Flow rate
y=Clean pressure drop

6. Ordering code

Example

<i>amaGuard FP</i>	3	40	U	X3	S
Cartridge type	Micron rating	Nominal length [inch]	Hardware material	Cartridge style	O-Ring material
	0.2	40 (1016 mm)	U=polypropylene (PP core and outer netting)	X3	N=Buna-N (standard) S=Silicone
	0.45				
	1				
	3				

X3=SOE with external 222 O-rings

MAHLE Industrial Filtration (Benelux) B.V.
P.O.Box 396 1800 AJ
Alkmaar - The Netherlands
Phone +31 (0) 72 5273400
Fax +31 (0) 72 5212507
mahle.amafilter @mahle.com
<http://www.mahle-industrialfiltration.com>
10/2009